


Typ / Type / Tipo Type / Tipo	iges	4-pol 50Hz 1400rpm n2 [min-1]	M _{amax} f _B =1 4 - pol. [Nm]	P _{1max} W f _B ≥ 1			PAM - IEC							
				4 - pol. 1400rpm [kW]	FR1 [kN]	FR2 [kN]	f _B → 39 - 107							
A353 F353 W   + PAM - IEC  	268.00	5.2	500	0.27	1.4	8.0	63	71						
	216.67	6.5	500	0.34	1.3	8.0	63	71						
	194.72	7.2	500	0.38	1.3	8.0	63	71						
		8.9	500	0.47	1.3	8.0	63	71						
		10.4	500	0.54	1.3	8.0	63	71	80	90				
	+	12.9	500	0.67	1.3	8.0	63	71	80	90				
	PAM - IEC	15.5	500	0.81	1.3	8.0	63	71	80	90				
		19.3	500	1.01	1.2	8.0	63	71	80	90				
		23.9	500	1.25	1.2	8.0	63	71	80	90				
A352 F352 W   + PAM - IEC  	56.95	24.6	490	1.26	1.2	8.0	71	80	90					
	49.88	28.1	490	1.44	1.1	8.0	71	80	90					
	46.04	30.4	490	1.56	1.1	8.0	71	80	90					
		35.4	490	1.81	1.1	8.0	71	80	90	100	112			
		41.8	490	2.14	1.0	8.0	71	80	90					
	+	43.7	490	2.24	1.0	8.0	71	80	90	100	112			
	PAM - IEC	48.5	490	2.49	1.0	7.9	71	80	90	100	112			
		52.6	490	2.70	0.9	7.6	71	80	90	100	112			
		55.7	470	2.74	0.9	7.5	71	80	90	100	112			
		63.6	470	3.13	0.9	7.1	71	80	90	100	112			
		68.9	460	3.32	0.8	6.9	71	80	90	100	112			
		76.5	460	3.68	0.8	6.5	71	80	90	100	112			
		83.0	450	3.91	0.7	6.3	71	80	90	100	112			
		96.4	430	4.34	0.6	6.0		80	90	100	112			
		119.3	390	4.87	0.6	5.7		80	90	100	112			
		143.6	370	5.56	0.4	5.3		80	90	100	112			
		160.4	340	5.71	0.4	5.2		80	90	100	112			
		198.4	290	6.02	0.3	5.1		80	90	100	112			
		238.8	260	6.50	0.3	4.8		80	90	100	112			
A351 F351 W   + PAM - IEC  	8.50	164.7	100	1.72	1.2	2.5	71	80	90					
	7.44	188.1	100	1.97	1.1	2.5	71	80	90					
	5.91	236.9	100	2.48	1.1	2.3	71	80	90	100	112			
		262.5	100	2.75	1.0	2.2	71	80	90	100	112			
		288.9	95	2.87	1.0	2.2	71	80	90	100	112			
	+	344.3	90	3.24	1.0	2.0	71	80	90	100	112			
	PAM - IEC	373.3	90	3.52	1.0	2.0	71	80	90	100	112			
		434.5	80	3.64	0.9	1.9	71	80	90	100	112			
		534.5	70	3.92	0.9	1.8	71	80	90	100	112			
		646.2	60	4.06	0.9	1.7		80	90	100	112			
		964.4	60	6.06	0.6	1.5		80	90	100	112			
		1074.4	40	4.50	0.8	1.5		80	90	100	112			




Technical drawing of the motor assembly showing dimensions and labels. The drawing includes the following dimensions and labels:

- kBre**: Total length of the assembly.
- k**: Distance from the front flange to the center of the motor.
- o**: Distance from the center of the motor to the rear flange.
- 161**: Distance between the two mounting holes on the front flange.
- 50**: Distance from the front flange to the first mounting hole.
- Ø24 16**: Diameter and thread of the front flange.
- 13**: Distance from the front flange to the first mounting hole.
- 12**: Distance from the front flange to the first mounting hole.
- 13'**: Distance from the front flange to the first mounting hole.
- 70**: Distance from the front flange to the first mounting hole.
- 107**: Distance from the front flange to the first mounting hole.
- 50**: Distance from the front flange to the first mounting hole.
- Ø11**: Diameter of the mounting hole.
- 51**: Distance from the front flange to the first mounting hole.
- 35**: Distance from the front flange to the first mounting hole.
- 8**: Distance from the front flange to the first mounting hole.
- 27**: Distance from the front flange to the first mounting hole.
- 7.5**: Distance from the front flange to the first mounting hole.
- M8**: Thread of the mounting hole.
- Øg**: Diameter of the rear flange.








Technical drawing of the motor assembly showing dimensions and labels:

- kBre**: Total length of the motor assembly.
- k**: Length of the motor body.
- 161**: Distance from the mounting flange to the start of the motor body.
- o**: Distance from the mounting flange to the center of the motor.
- g1**: Distance from the center of the motor to the center of the mounting flange.
- Øg**: Diameter of the mounting flange.
- Ø24 h6**: Diameter of the mounting flange hole.
- 50**: Distance from the mounting flange to the center of the motor.
- 51**: Distance from the mounting flange to the center of the motor.
- 14**: Distance from the mounting flange to the center of the motor.
- 14'**: Distance from the mounting flange to the center of the motor.
- 70**: Distance from the mounting flange to the center of the motor.
- 49**: Distance from the mounting flange to the center of the motor.
- 107**: Distance from the mounting flange to the center of the motor.
- Ø11**: Diameter of the mounting flange hole.
- 35**: Distance from the mounting flange to the center of the motor.
- 27**: Distance from the mounting flange to the center of the motor.
- 8**: Distance from the mounting flange to the center of the motor.
- 7.5**: Distance from the mounting flange to the center of the motor.
- M8**: Thread of the mounting flange hole.

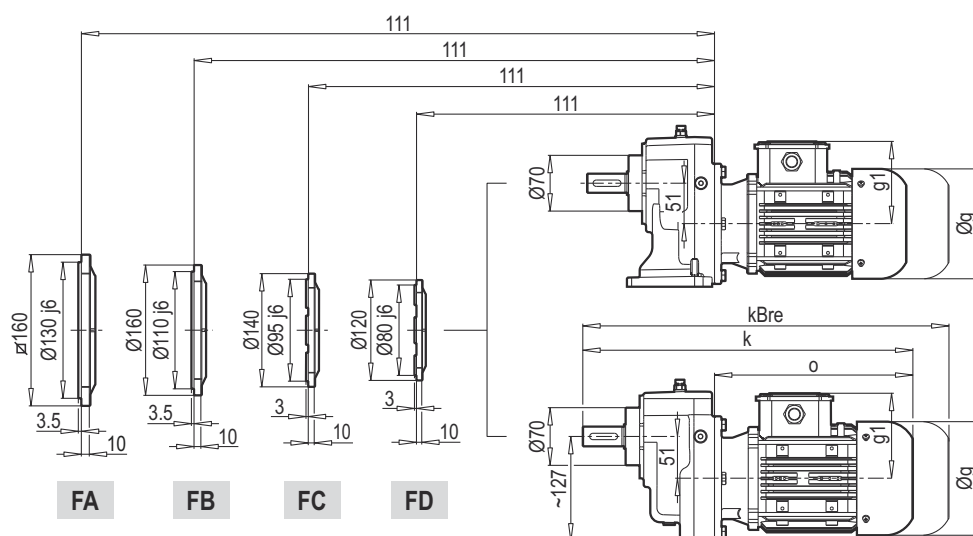

F 351











FA

FB

FC

FD

	71 M	80 M	90 S	90 L	100 L	112 M		
g	140	159	193	193	217	232		
g1	119	127	151	151	160	168		
k	402	428	474	494	495	554		
kBre	462	490	547	567	576	634		
o	241	267	313	333	334	393		

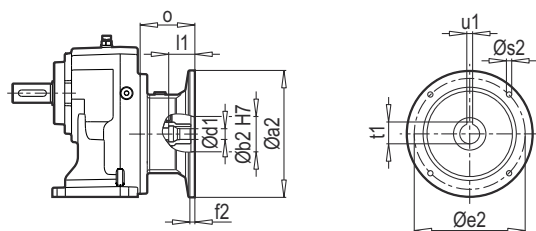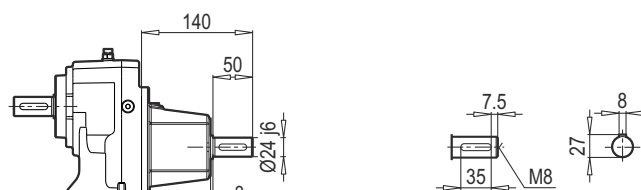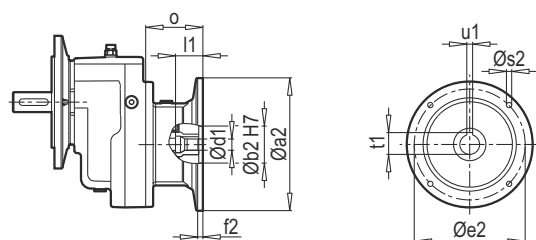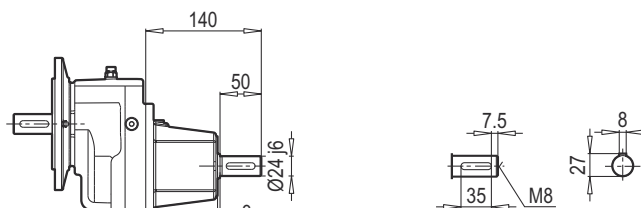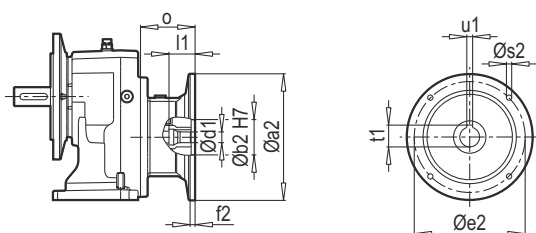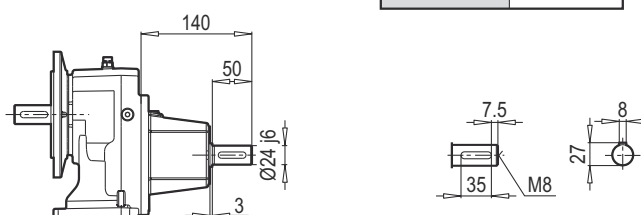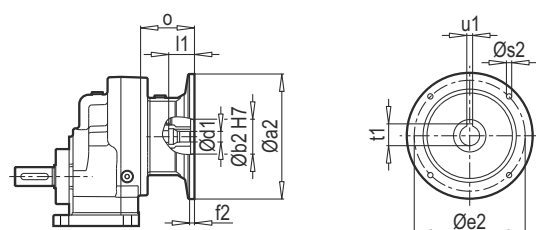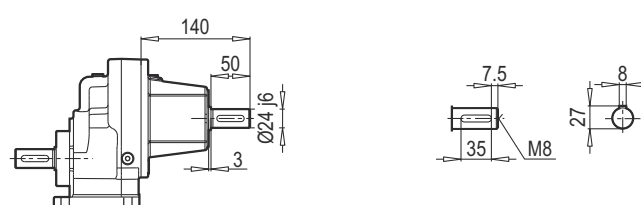A 351 PAM B5/B14

A 351 W

F 351 PAM B5/B14

F 351 W

AF 351 PAM B5/B14

AF 351 W

AF-M 351 PAM B5/B14

AF-M 351 W







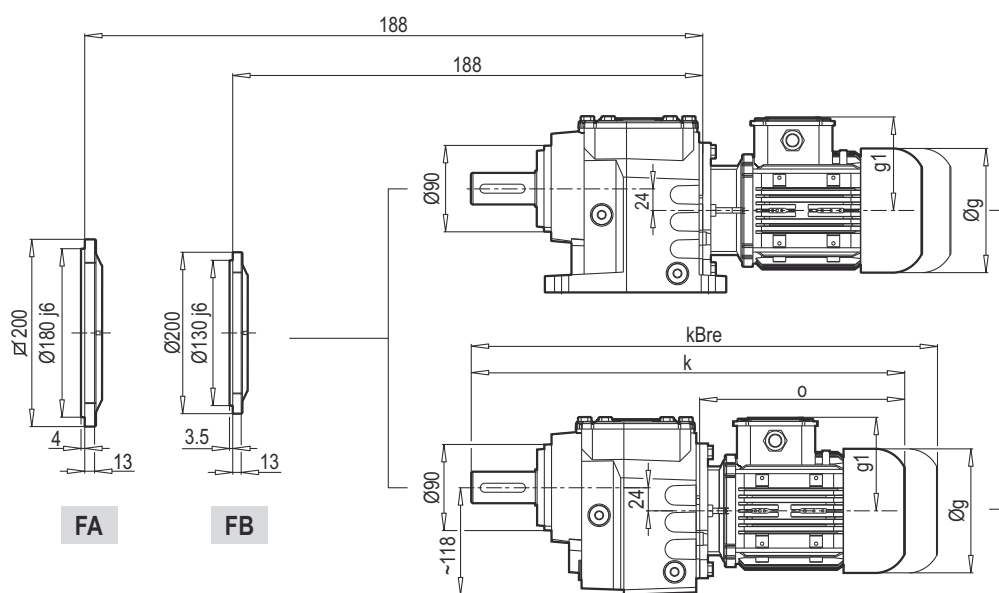

W ~ Kg	
A/F 351	12

Typ / Type / Tipo Type / Tipo	PAM B5	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 351	71	160	110	130	5	M8	14	32	16.3	5	69
	80	200	130	165	5	M10	19	42	21.8	6	90
	90	200	130	165	5	M10	24	52	27.3	8	90
	100	250	180	215	5.5	M12	28	62	31.3	8	105
	112	250	180	215	5.5	M12	28	62	31.3	8	105

~ Kg	
PAM B5	A/F 351
71	8
80	8.5
90	8.5
100	13
112	13


Typ / Type / Tipo Type / Tipo	PAM B14	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 351	71	105	70	85	2.5	7	14	32	16.3	5	69
	80	120	80	100	3	7	19	42	21.8	6	90
	90	140	95	115	3	9	24	52	27.3	8	90
	100	160	110	130	3.5	9	28	62	31.3	8	105
	112	160	110	130	3.5	9	28	62	31.3	8	105

~ Kg	
PAM B14	A/F 351
71	7
80	7.5
90	7.5
100	9.5
112	9.5


[illegible]

	63 M	71 M	80 M	90 S	90 L	100 L	112 M	
g	124	140	159	193	193	217	232	
g1	111	119	127	151	151	160	168	
k	470	499	525	571	591	592	651	
kBre	522	559	587	644	664	673	731	
o	212	241	267	313	333	334	393	


A 352-353 PAM B5/B14

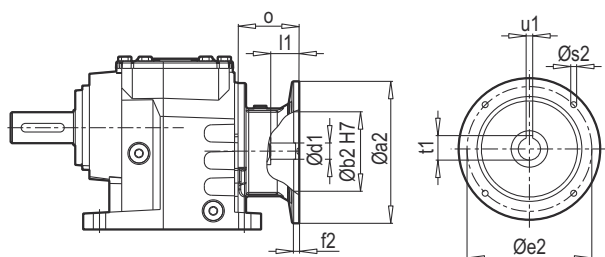


A 352-353 W

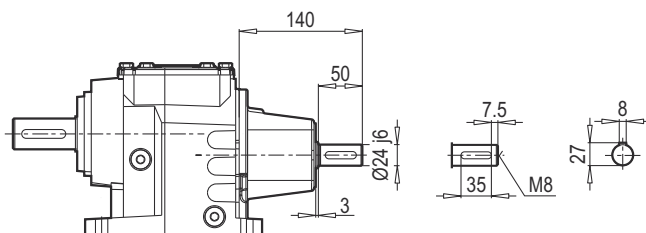


F 352-353 PAM B5/B14

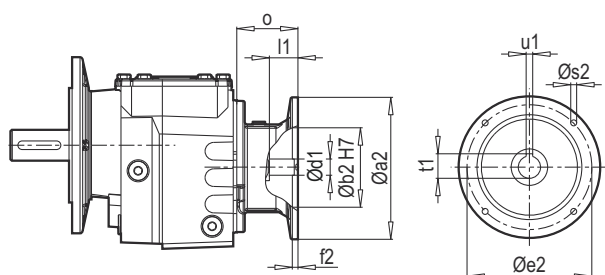


F 352-353 W

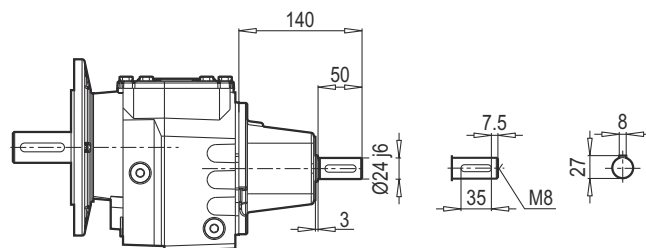

AF 352-353 PAM B5/B14

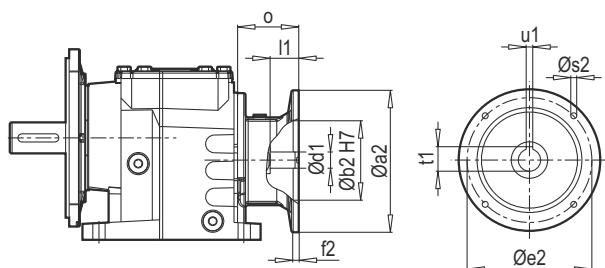

AF 352-353 W

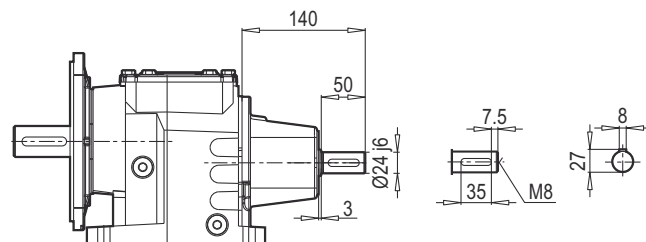

W ~ Kg	
A/F 352-353	22

Typ / Type / Tipo Type / Tipo	PAM B5	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 352 A/F 353	63	140	95	115	4.5	M8	11	25	12.8	4	57
	71	160	110	130	5	M8	14	32	16.3	5	69
	80	200	130	165	5	M10	19	42	21.8	6	90
	90	200	130	165	5	M10	24	52	27.3	8	90
	100	250	180	215	5.5	M12	28	62	31.3	8	105
	112	250	180	215	5.5	M12	28	62	31.3	8	105

~ Kg	
PAM B5	A/F 352-353
63	20
71	21
80	22
90	22
100	26
112	26

Typ / Type / Tipo Type / Tipo	PAM B14	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 352 A/F 353	63	90	60	75	2.5	6	11	25	12.8	4	57
	71	105	70	85	2.5	7	14	32	16.3	5	69
	80	120	80	100	3	7	19	42	21.8	6	90
	90	140	95	115	3	9	24	52	27.3	8	90
	100	160	110	130	3.5	9	28	62	31.3	8	105
	112	160	110	130	3.5	9	28	62	31.3	8	105

~ Kg	
PAM B14	A/F 352-353
63	19
71	20
80	21
90	21
100	23
112	23